


FORENSIC COMBODOCK™V4

Image 3.5" IDE Drives via FireWire OR USB with
Fourth Generation write-blocked field imager

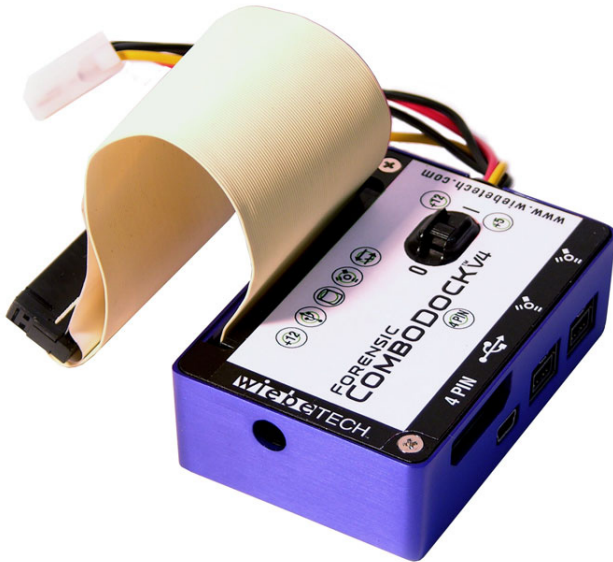

New write-blocked accesses through USB OR FireWire

Now WiebeTech's proprietary write-blocked technology offers easy read-only access to suspect hard drives through USB as well as FireWire 800 (400 compatible) for more versatility. Download and image contents of a suspect drive without risk of data being written back to the drive. Because it's based on the OXUF922 chip, FireWire transfer rates are really fast. And it's fully compatible with forensic acquisition and analysis software.

Even more LED indicators to monitor data transfer, including write-block feature

A new LED indicator assures you that write-block technology is active and protecting the data. Generation 4 is loaded with other indicators: FireWire attached, USB attached, +12V input jack active, disk drive power input jack active and +5V/+12V output active.

Better power status system

Fourth Generation Forensic ComboDock gives you multiple powering options. Attach it to any IDE drive (or even SATA drive, using an optional adapter). Power it via a +12V adapter (included) or via a standard disk drive 4-pin molex power source. It even has an on/off switch for safe drive power up and power down and a switch guard to prevent accidentally turning off the unit.

Easy to use!

Snap the suspect IDE drive into the Dock, plug in power and attach a FireWire or USB cable to a host computer. Then download and image the entire contents to your computer. That's all it takes. Use an optional SATA adapter to access SATA drives. The drive connector allows for automatic alignment and easy insertion. For more protection to the drive, a mounting plate can be screwed onto the bottom of the drive to protect the drive's circuitry.

Rugged design, built to last

Grab it and go – Forensic ComboDock is tough as nails and made to last. The small and rugged case is constructed from briefcase-tough aluminum for durability.

Connect even more types of drives with Combo Adapters

Use Forensic ComboDock in conjunction with our lineup of Combo Adapters and retrieve data on other drive types such as 1.8" Toshiba (found in iPods), 1.8" Hitachi drives, MicroDrives (found in iPod mini), PCMCIA drives, 2.5" notebook drives and SATA drives.

Tested and Formatted

When you buy a drive from WiebeTech, we go the extra mile to make sure your product works for your computer. Before your order is shipped, it is individually tested and formatted to your needs whether it is Mac, PC or both.

FEATURES

Write-blocked

Protects drive's contents by preventing disk writes. Uses industry-proven WiebeTech write-block technology.

Daisy-chained Dual FireWire 800 Ports (400 compatible); Single USB port

Endless configuration capabilities.

Write-block feature active

Identifies write protection technology is operational.

FireWire Host Detection LED

Identifies valid FireWire host attachment.

USB Host Detection LED

Identifies USB attachment.

+12V DC Power In

Allows powering using the included AC adapter.

Disk Drive Power In

Allows powering from standard 4-pin drive power connectors as is found in most computers.

+12V Power Input LED

Identifies valid power input source on +12V input jack.

Disk Drive Power In LED

Identifies valid power input source on 4-pin drive power input socket.

+5V, +12V LEDs

Verifies that power output is operational.

On / Off Switch

Allows Power Up / Down.

Rigid Connector and Ribbon Cable Connector

Allows flexible attachment to drives inside computers.

Plug and Play

No new drivers necessary for usage with Windows XP, Mac OS X and Linux distributions that support FireWire.

Aluminum case

Briefcase tough; excellent heat dissipation.

Small size

Fits in a pocket.

INCLUDES:

Forensic ComboDock v4	
Ribbon cable	
AC adapter	
FireWire 800-400 cable	
USB cable	
Drive bottom plate and screws	
Information CD	
Limited Warranty Statement	
FCDKV4-SATA	Also includes FCDKV4, SATA adapter and SATA cable

First-class Tech Support

We don't want anything to go wrong with your WiebeTech product. But if it does, Tech Support is standing by and ready to help. We offer 90 days of free phone support at 1-866-744-8722. After 90 days, email support is available at support@wiebetech.com.

TECHNICAL SPECIFICATIONS

Interface

Two daisy-chainable FireWire 800 ports: OXUF922
USB2: OXUF922

Power

External power supply: 100-240VAC +12V / +3A (Included)
Power input: +12V DC input jack; +12V / +5V standard disk drive 4-pin jack (Molex connector)
Power output: +12V / +5V
Power switch: On / Off

LED Indicators

Write-block technology active
FireWire attached
USB attached
+12V input jack active
Disk drive power input jack active
+5V power operational
+12V power operational
Access indicator

Drive Connectors

Ribbon cable connector

Data Speeds

FireWire 800: up to 800 Mbps
FireWire 400: up to 400 Mbps
USB2 port: up to 480 Mbps

Operating Temperature

50° - 85° Fahrenheit (10° - 30° Celsius)

Operating Humidity

5% to 95%, noncondensing

Drive Compatibility

3.5" IDE drive
Optional SATA adapter expands range of drives that can be attached and analyzed.

Operating System

Windows XP
Macintosh OS X
Linux distributions that support FireWire

Shipping Weight

3 lbs. (including AC adapter)

Dimensions

3.2" x 2.2" x 0.95" (81mm x 56mm x 24mm) exclusive of attached plates, drives and cables

Certification

FCC, CE